



# Datasheet

## Gas Discharge Tube (GDT)

Series / Models	2RL-8TH Series
Product Code	10.10.85.XXXX
Version	A0
Date	2025-03-11
File Number	SP-GDT-275

Gas Discharge Tube (GDT)

2RL-8TH Series

Version History

Version	Date	Page	Description	Author
A0	2025-03-11	/	Initial draft	Xia Wu

## Gas Discharge Tube (GDT)

## 2RL-8TH Series


### Description

Gas discharge tubes (GDTs) are generally in a high insulation resistance state, equivalent to an open circuit, which has almost no impact on the normal operation of the circuit. When transient overvoltage occurs in the circuit and the voltage amplitude exceeds the breakdown voltage of the GDT, the gas inside the GDT is ionized, causing the GDT to quickly conduct and limit the overvoltage to a lower level, thereby protecting electronic devices or circuit components connected in parallel from high voltage impact damage. After the overvoltage disappears, the GDT immediately returns to a high insulation resistance state, and the circuit resumes normal operation.

2RL-8TH is a small size ultra-thin radial lead GDT with advanced manufacturing process and epoxy resin coating on its surface, which has excellent performance. Epoxy coating provides excellent electrical insulation, mechanical protection and moisture resistance, making it suitable for use in harsh environments. Radial lead structure is easy to install and connect on PCB and other equipment, and has unique advantages over axial lead in some PCB layouts. The ultra-thin design meets some application scenarios that require strict space size, such as compact electronic devices. The low residual voltage design can effectively limit the residual voltage level after overvoltage and reduce the risk of subsequent circuit component damage. It is suitable for precision circuits with low voltage fluctuation tolerance.



### Electrical symbol




### Features

- I Patented technology
- I Occupy smaller PCB area
- I Excellent response to fast rising transients
- I Stable breakdown voltage
- I GHz working frequency
- I 8/20μs Impulse current capability: 10KA / 5KA / 4KA
- I Non-Radioactive
- I Ultra Low capacitance (<3pF)
- I GDT diameter: Φ8mm

### Applications

- I Telecom CPE
- I Communication equipment
- I Surge Protective Devices
- I High density PCB assemblies



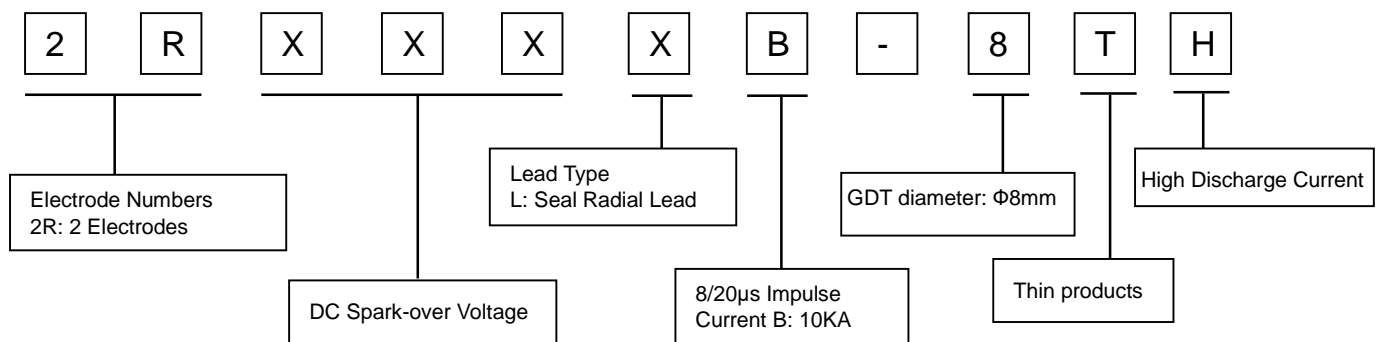


### Part Number Code



# Gas Discharge Tube (GDT)

# 2RL-8TH Series

## Electrical Characteristics

Model		2R090LB-8TH	2R230LB-8TH	2R350LB-8TH	2R470LB-8TH	Units
<b>DC Spark-over Voltage</b> <sup>1) 2)</sup>	at 100V/S	90±30%	230±30%	350±30%	470±30%	V
<b>Impulse Spark-over Voltage</b>	at 100V/μS	<500	<600	<500	<600	V
	at 1KV/μS	<600	<700	<600	<700	V
<b>Front of wave spark-over voltage</b>	at 1.2/50 μs, 6 kV	<800	<850	<750	<850	V
<b>Service life (According to IEC 61643-311)</b>						
Nominal impulse discharge current	8/20μs ±5 times	10	10	10	10	KA
Max. impulse discharge current	8/20μs 1 time	20	20	20	20	KA
Impulse discharge current	10/350μs 2 times	2	2	2	2	KA
Alternating Discharge Current	50Hz, 1S 10 times	5	5	5	5	A
Impulse life	10/1000μS 300 times	100	100	100	100	A
<b>Glow Voltage</b>	at 10mA	~60	~135	~135	~160	V
<b>Arc Voltage</b>	at 1A	~10	~15	~15	~18	V
<b>Insulation Resistance</b>		>1	>1	>1	>1	GΩ
Insulation Resistance Measuring Voltage		50	100	100	100	V <sub>DC</sub>
<b>Capacitance</b>	at 1MHz	<3	<3	<3	<3	pF
<b>Weight</b>		~1.1	~1.1	~1.1	~1.1	g
<b>Operation and storage temperature</b>		-40~+125	-40~+125	-40~+125	-40~+125	°C
<b>Climatic category (IEC60068-1)</b>		40/125/21	40/125/21	40/125/21	40/125/21	
<b>Certifications <sup>3)</sup></b>						
	UL1449	E508408	©	©	©	©
	EN 61643-311 IEC 61643-311	R 50655662	--	--	--	--
<b>Marking, Laser marking</b>		RUILON 2R090LB-8TH 	RUILON 2R230LB-8TH 	RUILON 2R350LB-8TH 	RUILON 2R470LB-8TH 	
<b>Surface treatment</b>	Body	Epoxy resin coating, red				
	Leads	Tin plated				
<b>Moisture sensitivity level <sup>4)</sup></b>		1				











# Gas Discharge Tube (GDT)

# 2RL-8TH Series

Model		2R600LB-8TH	2R800LB-8TH	2R1000L-8TH	2R1500L-8TH	Units
<b>DC Spark-over Voltage</b> <sup>1) 2)</sup>	at 100V/S	600±20%	800±20%	1000±20%	1500±20%	V
<b>Impulse Spark-over Voltage</b>	at 100V/μS	<750	<1000	<1200	<1800	V
	at 1KV/μS	<850	<1100	<1300	<2000	V
<b>Front of wave spark-over voltage</b>	at 1.2/50 μs, 6 kV	<1000	<1300	<1500	<2300	V
<b>Service life (According to IEC 61643-311)</b>						
Nominal impulse discharge current	8/20μs ±5 times	10	10	10	10	KA
Max. impulse discharge current	8/20μs 1 time	20	20	20	20	KA
Impulse discharge current	10/350μs 2 times	2	2	2	2	KA
Alternating discharge current	50Hz, 1S 10 times	5	5	5	5	A
Impulse life	10/1000μS 300 times	100	100	100	100	A
	1.2/50μS, 2Ω 40 times	20	20	20	20	KV
	1.2/50μS, 12Ω 80 times	20	20	20	20	KV
<b>Glow Voltage</b>	at 10mA	~180	~180	~200	~200	V
<b>Arc Voltage</b>	at 1A	~18	~18	~18	~20	V
<b>AC withstand voltage</b>	at 5mA 1minute	--	--	500	750	V
<b>Insulation Resistance</b>		>1	>1	>1	>1	GΩ
Insulation Resistance Measuring Voltage		100	100	100	100	V <sub>DC</sub>
<b>Capacitance</b>	at 1MHz	<3	<3	<3	<3	pF
<b>Weight</b>		~1.1	~1.1	~1.1	~1.1	g
<b>Operation and storage temperature</b>		-40~+125	-40~+125	-40~+125	-40~+125	°C
<b>Climatic category (IEC60068-1)</b>		40/125/21	40/125/21	40/125/21	40/125/21	
<b>Certifications <sup>3)</sup></b>						
 	UL1449	E508408	©	©	©	©
	EN 61643-311 IEC 61643-311	R 50655662	--	--	©	--
<b>Marking, Laser marking</b>		RUILON 2R600LB-8TH 	RUILON 2R800LB-8TH 	RUILON 2R1000L-8TH  	RUILON 2R1500L-8TH 	
<b>Surface treatment</b>	Body	Epoxy resin coating, red				
	Leads	Tin plated				
<b>Moisture sensitivity level <sup>4)</sup></b>		1				

# Gas Discharge Tube (GDT)

## 2RL-8TH Series

Model		2R2000L-8TH	2R2500L-8TH	2R3000L-8TH	2R3600L-8TH	Units
DC Spark-over Voltage <sup>1) 2)</sup>	at 100V/S	2000±20%	2500±20%	3000±20%	3600±20%	V
Impulse Spark-over Voltage	at 100V/μS	<2500	<3000	<3600	<4300	V
	at 1KV/μS	<2700	<3200	<3800	<4500	V
Front of wave spark-over voltage	at 1.2/50 μs, 6 kV	<3000	<3500	<4000	<4800	V
Service life (According to IEC 61643-311)						
Nominal impulse discharge current 8/20μs ±5 times		5	5	4	4	KA
Max. impulse discharge current 8/20μs 1 time		10	10	5	5	KA
Alternating discharge current 50Hz,1S 10 times		2.5	2.5	2	2	A
Glow Voltage	at 10mA	~250	~250	~250	~250	V
Arc Voltage	at 1A	~30	~30	~30	~30	V
AC withstand voltage	at 5mA 1minute	1000	1300	1600	1900	V
Insulation Resistance		>1	>1	>1	>1	GΩ
Insulation Resistance Measuring Voltage		500	500	500	500	V <sub>DC</sub>
Capacitance	at 1MHz	<3	<3	<3	<3	pF
Weight		~1.1	~1.1	~1.1	~1.1	g
Operation and storage temperature		-40~+125	-40~+125	-40~+125	-40~+125	°C
Climatic category (IEC60068-1)		40/125/21	40/125/21	40/125/21	40/125/21	
Certifications <sup>3)</sup>						
<div><div></div><div>UL1449E508408</div></div>		◎	◎	◎	◎	
<div><div></div><div>EN 61643-311 IEC 61643-311R 50655662</div></div>		◎	--	--	◎	
Marking, Laser marking		RUILON 2R2000L-8TH  	RUILON 2R2500L-8TH  	RUILON 2R3000L-8TH  	RUILON 2R3600L-8TH  	
Surface treatment		Body	Epoxy resin coating, red			
		Leads	Tin plated			
Moisture sensitivity level <sup>4)</sup>		1				

<sup>1)</sup> At delivery AQL 0.65 level II, DIN ISO 2859.

<sup>2)</sup> In ionized mode.

<sup>3)</sup> © indicates that the product has passed the certification, -- indicates that the product is not certified.


<sup>4)</sup> Tests according to JEDEC J-STD-020.

Terms in accordance with ITU-T Rec. K.12, IEC 61643-311, GB/T18802.311, GB/T 9043.

# Gas Discharge Tube (GDT)


## 2RL-8TH Series

### Dimensions

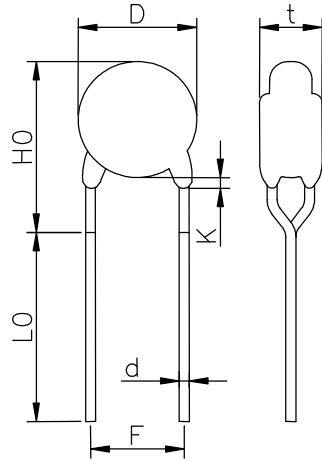

Symbol	Millimeters	Inches
D	Φ10 Max	Φ0.394 Max
d	Φ0.8±0.05	Φ0.031±0.002
F	7.5±0.5	0.295±0.020
H0	14.5 Max	0.571 Max
K	3 Max	0.118 Max
L0	15 Min	0.591 Min
t	7 Max	0.276 Max

### Packaging Information

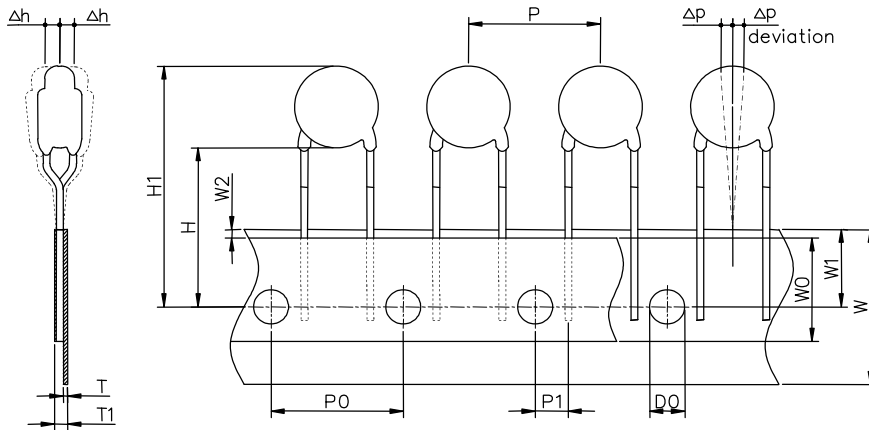



Direction of Unreeling

Packing and dimensions according to IEC 60286-2


Symbol	Millimeters	Inches
P	15.0±1.0	0.591±0.039
P0	15.0±0.3	0.591±0.012
P1	3.75±0.7	0.148±0.028
H	18+2/-0	0.709+0.079/-0
H1	33 Max	1.299 Max
T	0.9 Max	0.035Max
T1	1.7 Max	0.067 Max
W	18+1/-0.5	0.709+0.039/-0.020
W0	5.0 Min	0.197 Min
W1	9+0.75/-0.5	0.354+0.030/-0.020
W2	3.0 Max	0.118 Max
D0	Φ4±0.2	Φ0.157±0.008
Δh	2.0 Max	0.079 Max
Δp	1.3 Max	0.051 Max

# Gas Discharge Tube (GDT)

## 2RL-8TH Series

	Inner Box	Carton
Size	335×265×42mm	550×350×240mm
Quantity	MPQ/MOQ: 1 Inner Box=1,000pcs	1Carton=10 Inner Box=10,000pcs
Photos		

## Soldering Parameters - Wave soldering (Thru-Hole Devices)

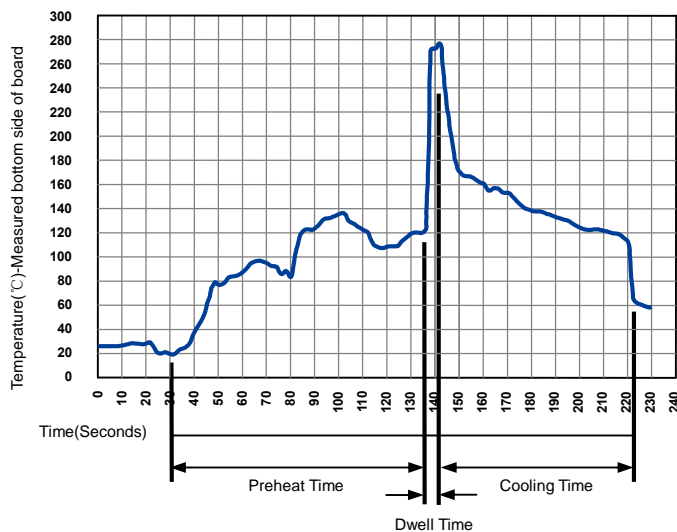


Wave Soldering Condition		Pb-Free assembly
Preheat	Temperature Min	100°C
	Temperature Max	150°C
	Time (Min to Max)	60-180 Seconds
Solder Pot Temperature		280°C Max
Solder Dwell Time		2-5 Seconds



## Gas Discharge Tube (GDT)


## 2RL-8TH Series

### Construction

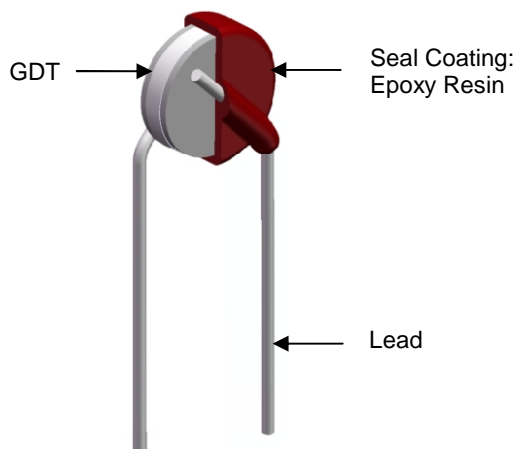

### Application Circuit

Use for AC1500V withstand voltage

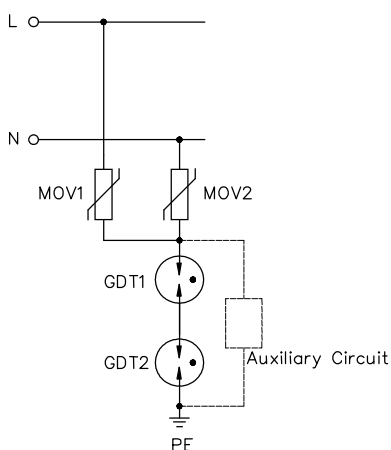

Symbol	Model
MOV1	14D471
MOV2	14D471
GDT1	2R1500L-8TH
GDT2	2R1500L-8TH

Electrical Characteristics (With auxiliary circuit)			
DC Spark-over Voltage		at 100V/S	2400~3600V
Impulse Spark-over Voltage		at 100V/μS	<2000V
		at 1KV/μS	<2300V
Front of wave spark-over voltage		at 1.2/50 μs, 6 kV	<2500V
AC withstand voltage		at 5mA 1minute	1500V
Service life			
Nominal impulse discharge current		8/20μs ±5 times	10KA
Maximum discharge current		8/20μs 1 times	15KA
Alternating Discharge Current		50Hz, 1S 10 times	3KA

### 1.2/50 μs, 6 kV Waveform ( + )



### 1.2/50 μs, 6 kV Waveform ( - )



# Gas Discharge Tube (GDT)

## 2RL-8TH Series

### Terms and definitions

NO.	Item	Definitions
1	Gas discharge tube(GDT)	Gap, or several gaps, in an enclosed discharge medium, other than air at atmospheric pressure, designed to protect apparatus or personnel, or both, from high transient voltages. Also referred to as "gas tube surge arrester".
2	DC Spark-over Voltage	The voltage at which the gas discharge tube sparks over with slowly increasing d.c. voltage.
3	Impulse Spark-over Voltage	The highest voltage which appears across the terminals of a gas discharge tube in the period between the application of an impulse of given wave-shape and the time when current begins to flow.
4	Impulse discharge current 8/20μs	Current impulse with a nominal virtual front time of 8 μs and a nominal time to half-value of 20 μs.
5	Impulse discharge current 10/350μs	Current impulse with a nominal virtual front time of 10 μs and a nominal time to half-value of 350 μs.
6	1,2/50 voltage impulse	Voltage impulse with a nominal virtual front time of 1,2 μs and a nominal time to half-value of 50 μs.
7	Maximum continuous operating voltage $U_c$	Maximum r.m.s. voltage, which may be continuously applied to the GDT's mode of protection.
8	Nominal discharge current $I_n$	Crest value of the current through the GDT having a current waveshape of 8/20.
9	Maximum discharge current $I_{max}$	Crest value of a current through the SPD having an 8/20 waveshape and magnitude according to the manufacturers specification. $I_{max}$ is equal to or greater than $I_n$ .
10	Impulse discharge current for class I test $I_{imp}$	Crest value of a discharge current through the SPD with specified charge transfer Q and specified energy W/R in the specified time.
11	Follow current $I_f$	Peak current supplied by the electrical power system and flowing through the SPD after a discharge current impulse.
12	Insulation Resistance	Insulation resistance shall be measured from each terminal to every other terminal of the GDT. The test is performed with DC50V when normal spark-over Voltage 70~150V, others with DC100V.
13	Capacitance	The capacitance shall be measured once at 1 MHz between all terminals unless otherwise specified.
14	Class I tests	Tests carried out with the impulse discharge current $I_{imp}$ , with an 8/20 current impulse with a crest value equal to the crest value of $I_{imp}$ , and with a 1,2/50 voltage impulse.
15	Class II tests	Tests carried out with the nominal discharge current $I_n$ , and the 1,2/50 voltage impulse.

## Cautions

- I Do not operate gas discharge tubes in power supply networks, whose maximum operating voltage exceeds the minimum spark-over voltage of the gas discharge tubes.
- I Gas discharge tubes may become hot in the event of longer periods of current stress (burn risk). In the event of overload the connectors may fail or the component may be destroyed.
- I Gas discharge tubes must be handled with care and must not be dropped.
- I Do not continue to use damaged gas discharge tubes.
- I The electrical characteristics described in this datasheet are only typical characteristics, and all of these characteristics have been confirmed through testing and inspection. If the customer's usage requirements are different from this or have special requirements, please contact Ruilongyuan Electronics Co., Ltd. If protection failure or circuit damage occurs as a result, our company is not responsible for it.
- I Ruilongyuan Electronics Co., Ltd. always strives to improve our products. Consequently, the products described in this datasheet may be updated from time to time, and the corresponding product specifications may also be updated accordingly. So, before or at the time of placing your order, please check to what extent the product descriptions and specifications contained in this publication are still applicable. Ruilongyuan Electronics Co., Ltd. still reserves the right to cease production and delivery of products. Consequently, we cannot guarantee that all products listed in this datasheet will always be available. The above provisions do not apply to individual agreements with customers for specific products.
- I Ruilongyuan Electronics Co., Ltd. models may have different product codes. Different product code representations are due to the use of different production processes, but do not affect their respective product specifications.